


# CU/PVC/SWA/PVC-Armoured Auxiliry Cables

Application	Cables specified in this table are intended for use in fixed installations in industrial areas, buildings and similar applications. The insulation and other components are suitable to permit operation of the cables at a maximum sustained conductor temperature of 70 °C.
Type	CU/PVC/SWA/PVC
Standards	BS 6346
Nominal Voltage	600/1000V
Insulation	70 °C rated PVC compound
Sheathing	PVC compound
Armour	Galvanized Steel wire
Packing	Supplied in coils of 100 meters or as per customer requirement
Conductor	Soft annealed copper wires

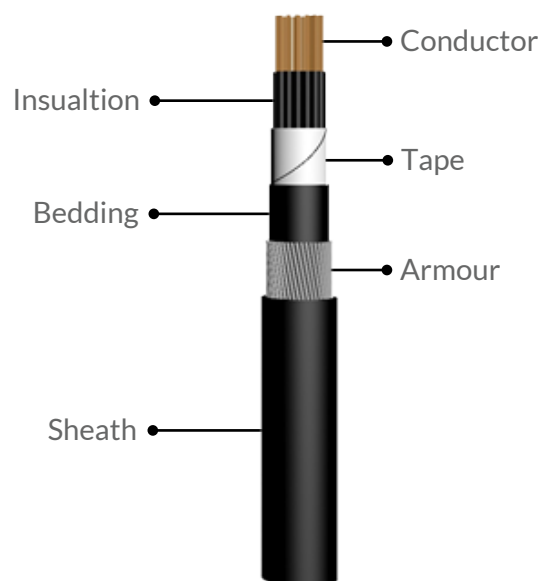

ITEM CODE	NO.OF CORES	NO:/NOM DIA mm	INSU. THICK. mm	BEDD. THICK. mm	A.WIRE DIA. mm	SHEATH THICK. mm	SHEATH O.D. mm
C - 141 b	6	7/0.53	0.6	0.8	0.9	1.4	15.17
C - 141*	7	7/0.53	0.6	0.8	0.9	1.4	15.17
C - 142 a	8	7/0.53	0.6	0.8	1.25	1.5	16.99
C - 142 b	9	7/0.53	0.6	0.8	1.25	1.5	17.94
C - 142 c	10	7/0.53	0.6	0.8	1.25	1.5	18.86
C - 142 d	11	7/0.53	0.6	0.8	1.25	1.5	19.28
C - 142*	12	7/0.53	0.6	0.8	1.25	1.5	19.28
C - 143 a	13	7/0.53	0.6	0.8	1.25	1.6	20.29
C - 143 b	14	7/0.53	0.6	0.8	1.25	1.6	20.29
C - 143 c	15	7/0.53	0.6	0.8	1.25	1.6	21.01
C - 143 d	16	7/0.53	0.6	0.8	1.25	1.6	21.01
C - 143 e	17	7/0.53	0.6	0.8	1.25	1.6	21.85
C - 143 f	18	7/0.53	0.6	0.8	1.25	1.6	21.85
C - 143*	19	7/0.53	0.6	0.8	1.25	1.6	21.85
C - 144 a	20	7/0.53	0.6	0.8	1.6	1.7	23.67
C - 144 b	21	7/0.53	0.6	1	1.6	1.7	24.07
C - 144 c	22	7/0.53	0.6	1	1.6	1.7	25.02
C - 144 d	23	7/0.53	0.6	1	1.6	1.7	25.02
C - 144 e	24	7/0.53	0.6	1	1.6	1.7	25.94
C - 144 f	25	7/0.53	0.6	1	1.6	1.7	26.36
C - 144 g	26	7/0.53	0.6	1	1.6	1.7	26.36
C - 144*	27	7/0.53	0.6	1	1.6	1.7	27.08
C - 145 a	28	7/0.53	0.6	1	1.6	1.8	27.28
C - 145 b	29	7/0.53	0.6	1	1.6	1.8	27.28
C - 145 c	30	7/0.53	0.6	1	1.6	1.8	27.28
C - 145 d	31	7/0.53	0.6	1	1.6	1.8	28.09
C - 145 e	32	7/0.53	0.6	1	1.6	1.8	28.09
C - 145 f	33	7/0.53	0.6	1	1.6	1.8	28.09
C - 145 g	34	7/0.53	0.6	1	1.6	1.8	28.09
C - 145 h	35	7/0.53	0.6	1	1.6	1.8	28.93
C - 145 i	36	7/0.53	0.6	1	1.6	1.8	28.93
C - 145*	37	7/0.53	0.6	1	1.6	1.8	28.93
C - 146 a	38	7/0.53	0.6	1	1.6	1.9	30.05
C - 146 b	39	7/0.53	0.6	1	1.6	1.9	30.05
C - 146 c	40	7/0.53	0.6	1	1.6	1.9	30.05
C - 146 e	41	7/0.53	0.6	1	1.6	1.9	31
C - 146 d	42	7/0.53	0.6	1	1.6	1.9	31
C - 146 f	43	7/0.53	0.6	1	1.6	1.9	31
C - 146 g	44	7/0.53	0.6	1	1.6	1.9	31.92
C - 146 h	45	7/0.53	0.6	1	1.6	1.9	32.34
C - 146 i	46	7/0.53	0.6	1	1.6	1.9	32.34
C - 146 j	47	7/0.53	0.6	1	1.6	1.9	32.34
C - 146*	48	7/0.53	0.6	1	1.6	1.9	32.34