


BUILDING WIRES - TWIN FLAT wires

Application	Cables specified in this table are intended for use in fixed installations for power and lighting. The insulation and other components are suitable to permit operation of the cables at a maximum sustained conductor temperature of 70 °C.
Type	Cu/PVC/PVC TWIN FLAT Fire Guard
Standards	BS 6004, SLS733
Nominal Voltage	300/500V
Insulation	70 °C rated PVC compound
Sheathing	PVC compound
Packing	Supplied in coils of 100 meters or as per customer requirement
Conductor	Soft annealed copper wires

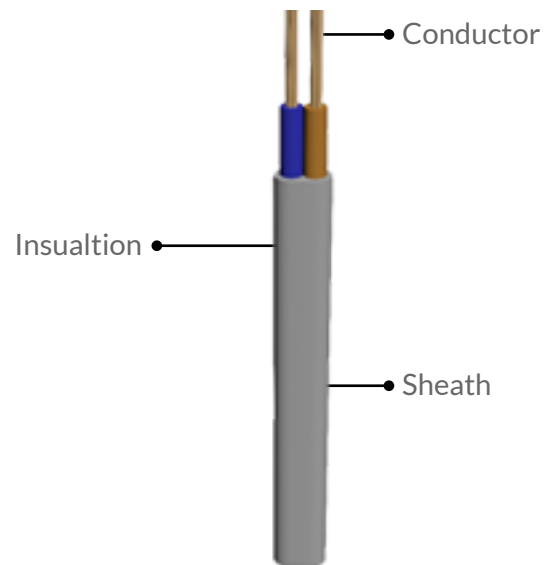

ITEM CODE	N.C. AREA mm ²	NO/NOM DIA. mm	INS. THICK. mm	SHEATH THICK. mm	SHEATH O.D. mm		Maximum DC Resistance Ohm/km	Packing	
								Packaging Type	Cable Length
A - 104	1	1/1.13	0.60	0.9	4.1	x 6.4	18.1	Coil	100m
A - 105	1.5	1/1.38	0.70	0.9	4.57	x 7.3	12.1	Coil	100m
A - 134	1.5	7/0.53	0.70	0.9	4.76	x 7.7	12.1	Coil	100m
A - 106	2.5	1/1.78	0.80	1	5.37	x 8.7	7.41	Coil	100m
A - 135	2.5	7/0.67	0.80	1	5.58	x 9.2	7.41	Coil	100m
A - 107	4	7/0.85	0.80	1	6.12	x 10	4.61	Coil	100m
A - 108	6	7/1.04	0.80	1.1	6.92	x 12	3.08	Coil	100m
A - 109	10	7/1.35	1.00	1.2	8.45	x 15	1.83	Coil	100m
A - 110	16	7/1.70	1.00	1.3	9.7	x 17	1.15	Coil	100m